


# Fleck MM Filters



## Dimensions (mm)

Model Reference	Valve H1	Vessel H2	Vessel B1	Filter Ht	Inlet/Outlet	Drawing No
FLF25C10MM	220	1387	257	1607	1"	Fig. 1
FLF25C13MM	220	1374	334	1594	1"	Fig. 1
FLF25C14MM	220	1660	369	1880	1"	Fig. 1
FLF25C16MM	220	1660	406	1880	1"	Fig. 1
FLF27C18MM	220	1750	469	1970	1"	Fig. 1
FLF28C21MM	220	1640	552	1860	1½"	Fig. 1
FLF31C24MM	200	2230	610	2430	2"	Fig. 2
FLF31C30MM	200	2300	770	2500	2"	Fig. 2
FLF31C36MM	200	2350	927	2550	2"	Fig. 2
FLF31C42MM	200	2435	1074	2635	2"	Fig. 2

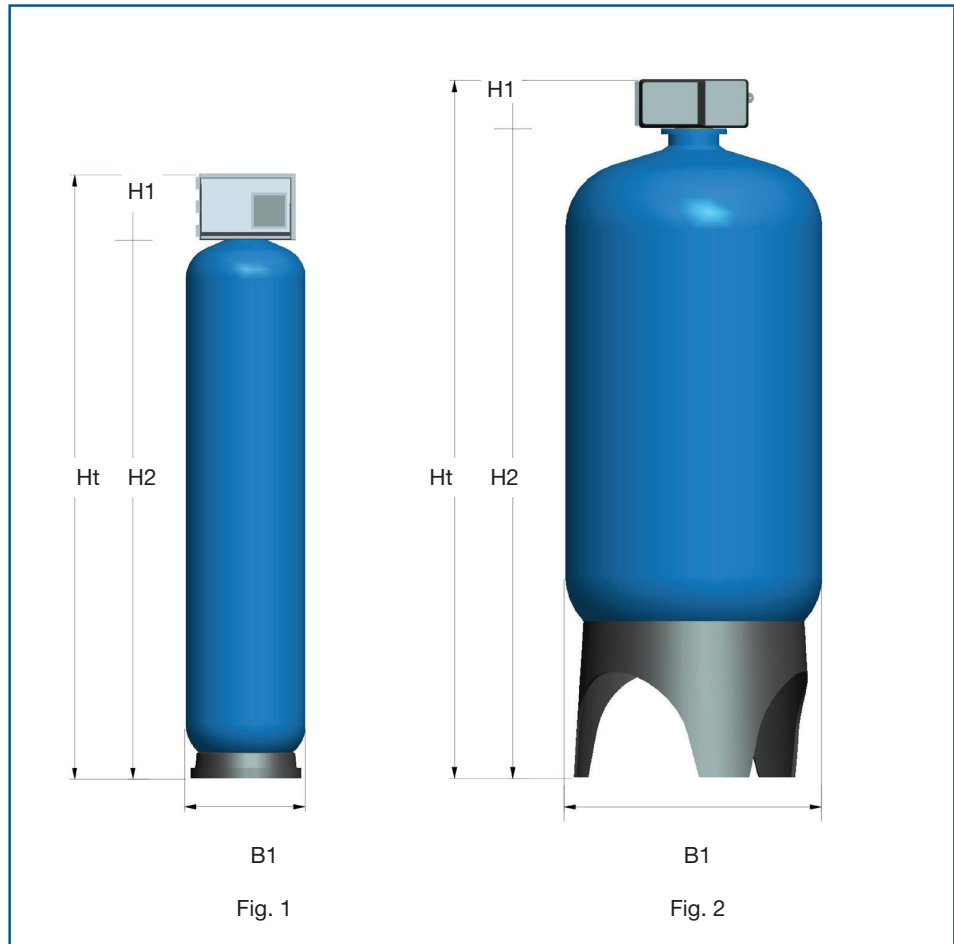

# Fleck MM Filters

## General conditions for installation

Connection Inlet & Outlet	2510 / 2750 :	1" BSP
	2850 :	1½" BSP
	3150 :	2" BSP
Electrical Rating	:	230-24V / 50 Hz
Power Rating	:	55 watts
Minimum Inlet Pressure	:	200 kPa ( 2 Bar )
Maximum Inlet Pressure	:	700 kPa ( 7 Bar )
Vacuum	:	Not permitted
Average Pressure Loss	:	100 kPa ( 1 Bar )
Maximum Water Temperature	:	43°C

## Media

Type	:	Anthracite
	:	08. - 1.25mm Filter sand
	:	3 - 5mm Support Gravel
Life Span	:	Dependent on frequency of backwashing and site conditions

Specification					
Vessel Diameter	10"	13"	14"	16"	18"
Service flow rate m³/hr	0.6	1.1	1.2	1.5	1.9
Backwash flow rate m³/hr	1.2	2.0	2.4	3.2	4.1

Vessel Diameter	21"	24"	30"	36"	42"
Service flow rate m³/hr	2.6	3.5	5.4	7.8	10.7
Backwash flow rate m³/hr	5.2	7.3	11.4	16.4	22.3

## Regeneration

Start	:	Programmable regeneration time + day interval
Manual	:	Manual operation as required

